


FOR USE WITH 240VAC HEATERS

240VAC SINGLE PHASE INPUT

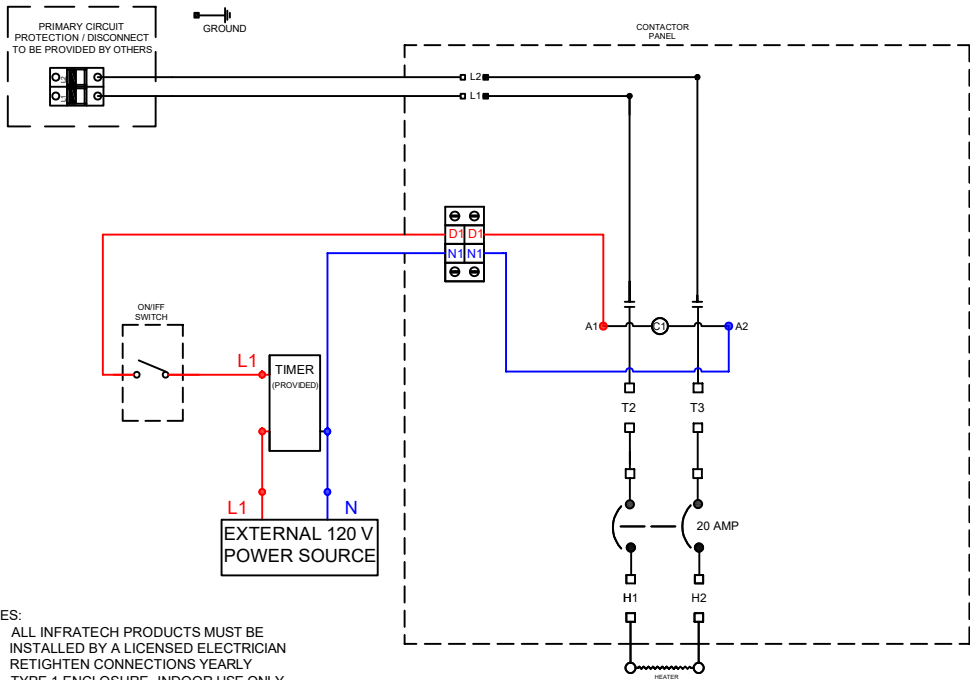


NOTE: MAX 20-AMPS PER BREAKER

NOTES:

1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
2. RETIGHTEN CONNECTIONS YEARLY
3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
4. NOT COMPATIBLE WITH INF CONTROLS
5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER

FOR USE WITH 208VAC HEATERS

208VAC SINGLE PHASE INPUT

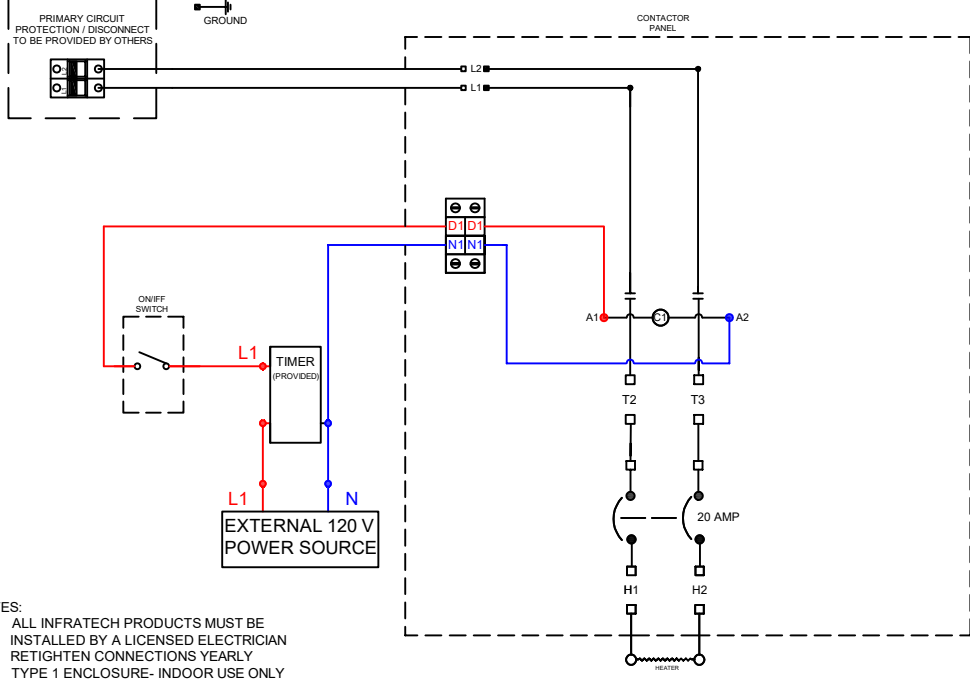


NOTE: MAX 20-AMPS PER BREAKER

NOTES:

1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
2. RETIGHTEN CONNECTIONS YEARLY
3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
4. NOT COMPATIBLE WITH INF CONTROLS
5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER

FOR USE WITH 480VAC HEATERS

480VAC SINGLE PHASE INPUT

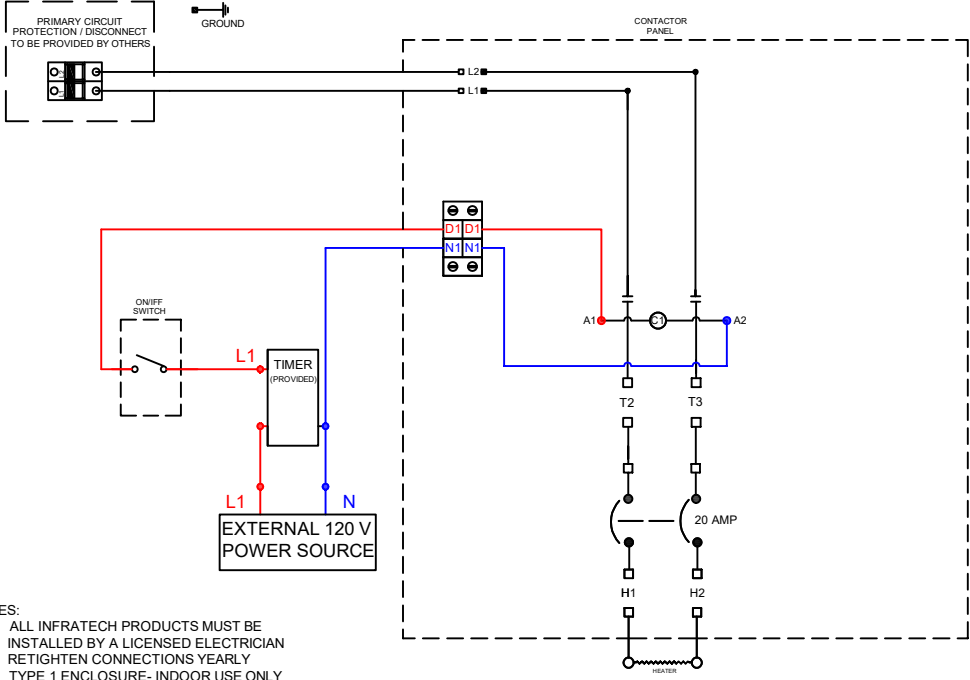

NOTE: MAX 20-AMPS PER BREAKER

NOTES:


1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
2. RETIGHTEN CONNECTIONS YEARLY
3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
4. NOT COMPATIBLE WITH INF CONTROLS
5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER

CONTACT INFRATECH FOR A CUSTOM CONTACTOR PANEL.

INFRATECH www.infratech-usa.com		344 W. 157th Street Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674
DESCRIPTION	SINGLE CONTACTOR PANEL WITH BREAKER, SINGLE PHASE INPUT, PROVIDED TIMER.	
PART#	14-4700-20B	
DATE	ITEM#	CP-6000-1X-20B
May 24, 2024	DWG#	CPDIAG1-20B

FOR USE WITH 240VAC HEATERS

240VAC SINGLE PHASE INPUT

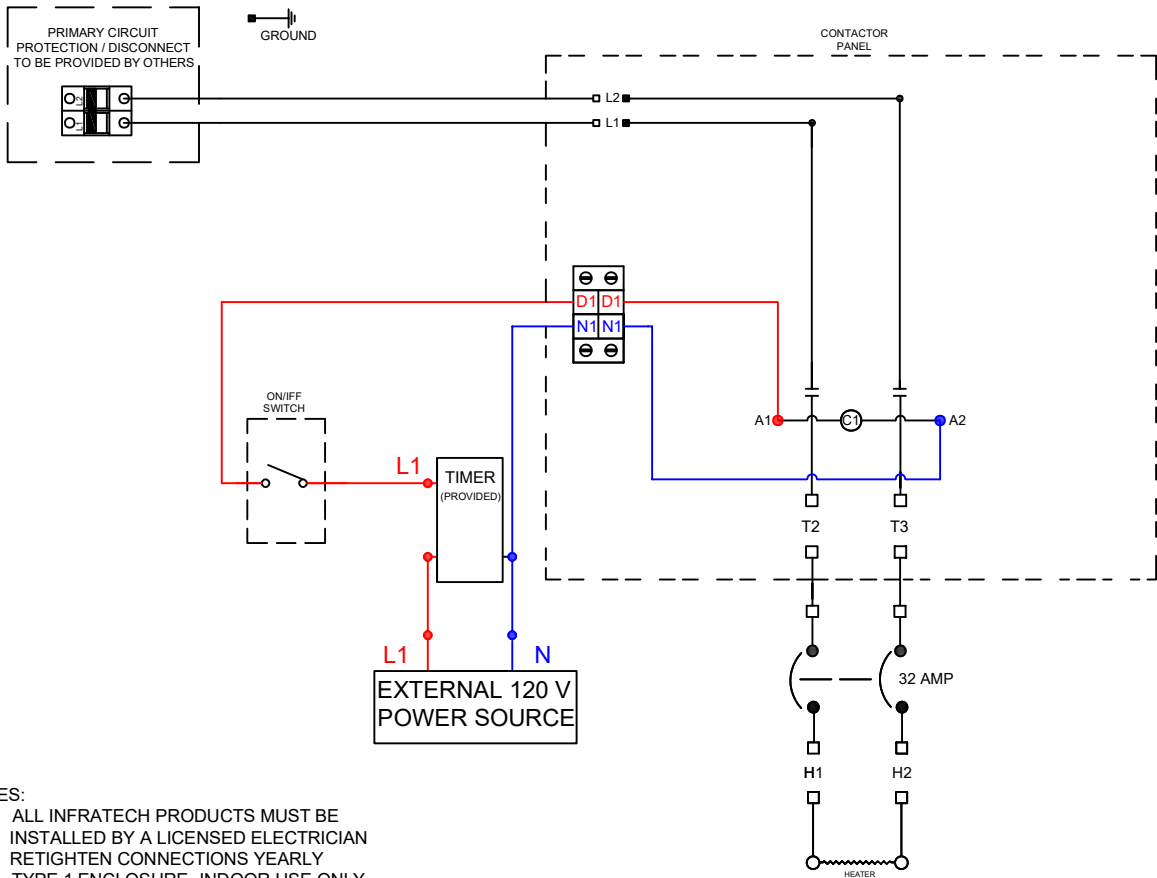


NOTE: MAX 32-AMPS PER BREAKER

- NOTES:
1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
 2. RETIGHTEN CONNECTIONS YEARLY
 3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
 4. NOT COMPATIBLE WITH INF CONTROLS
 5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER

FOR USE WITH 208VAC HEATERS

208VAC SINGLE PHASE INPUT

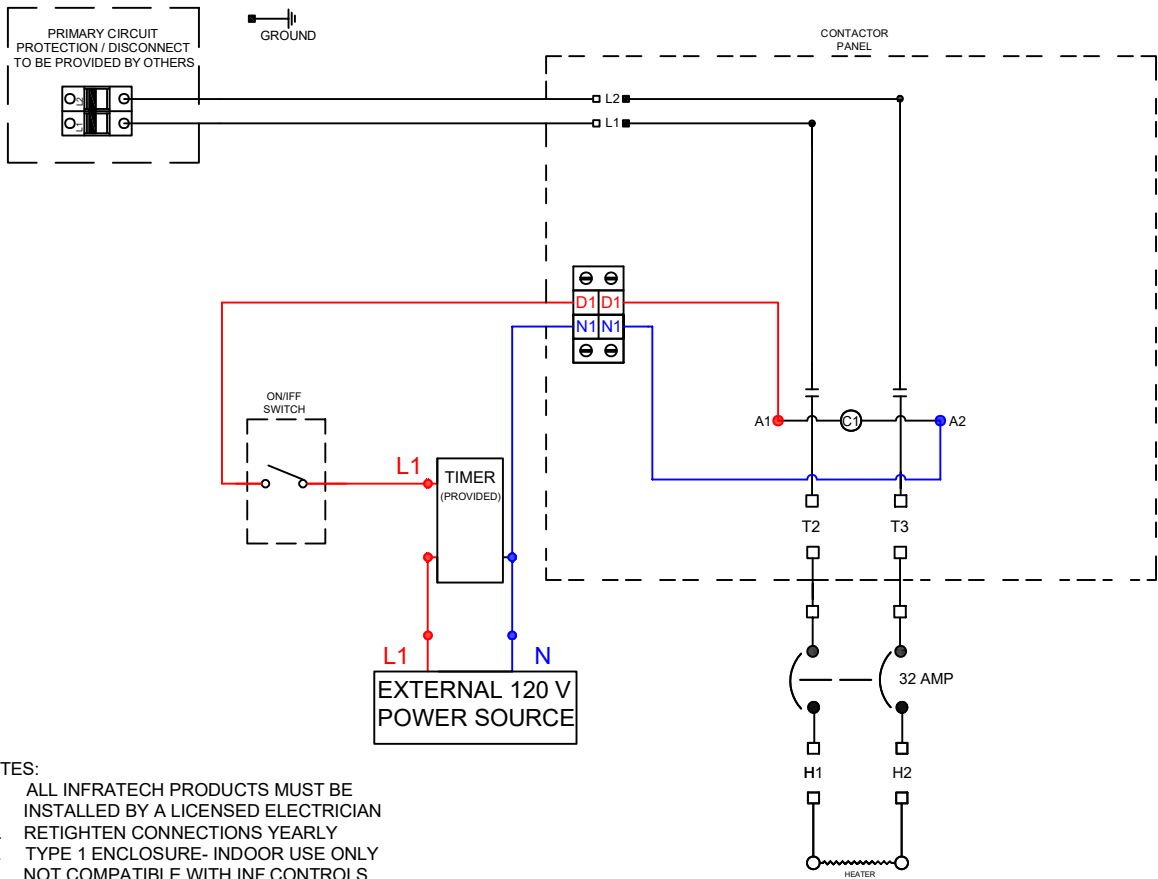


NOTE: MAX 32-AMPS PER BREAKER

- NOTES:
1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
 2. RETIGHTEN CONNECTIONS YEARLY
 3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
 4. NOT COMPATIBLE WITH INF CONTROLS
 5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER


CONTACT INFRATECH FOR A CUSTOM CONTACTOR PANEL.

INFRATECH www.infratech-usa.com		344 W. 157th Street Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674
DESCRIPTION		SINGLE CONTACTOR PANEL WITH BREAKER, SINGLE PHASE INPUT, PROVIDED TIMER.
DATE		PART# 14-4700-32B
May 24, 2024		ITEM# CP-6000-1X-32B
		DWG# CPDIAG1-32B


FOR USE WITH 240VAC HEATERS

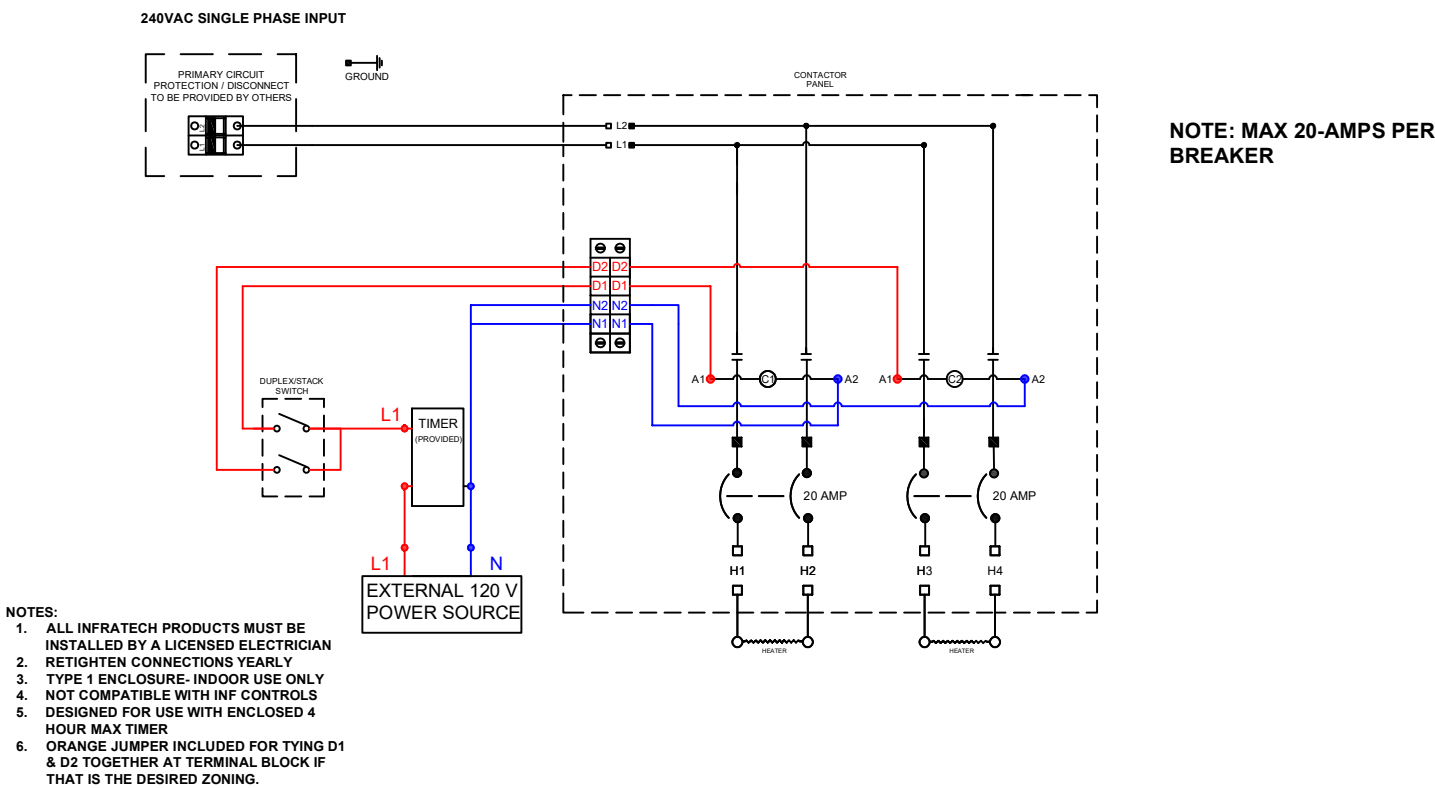

FOR USE WITH 208VAC HEATERS

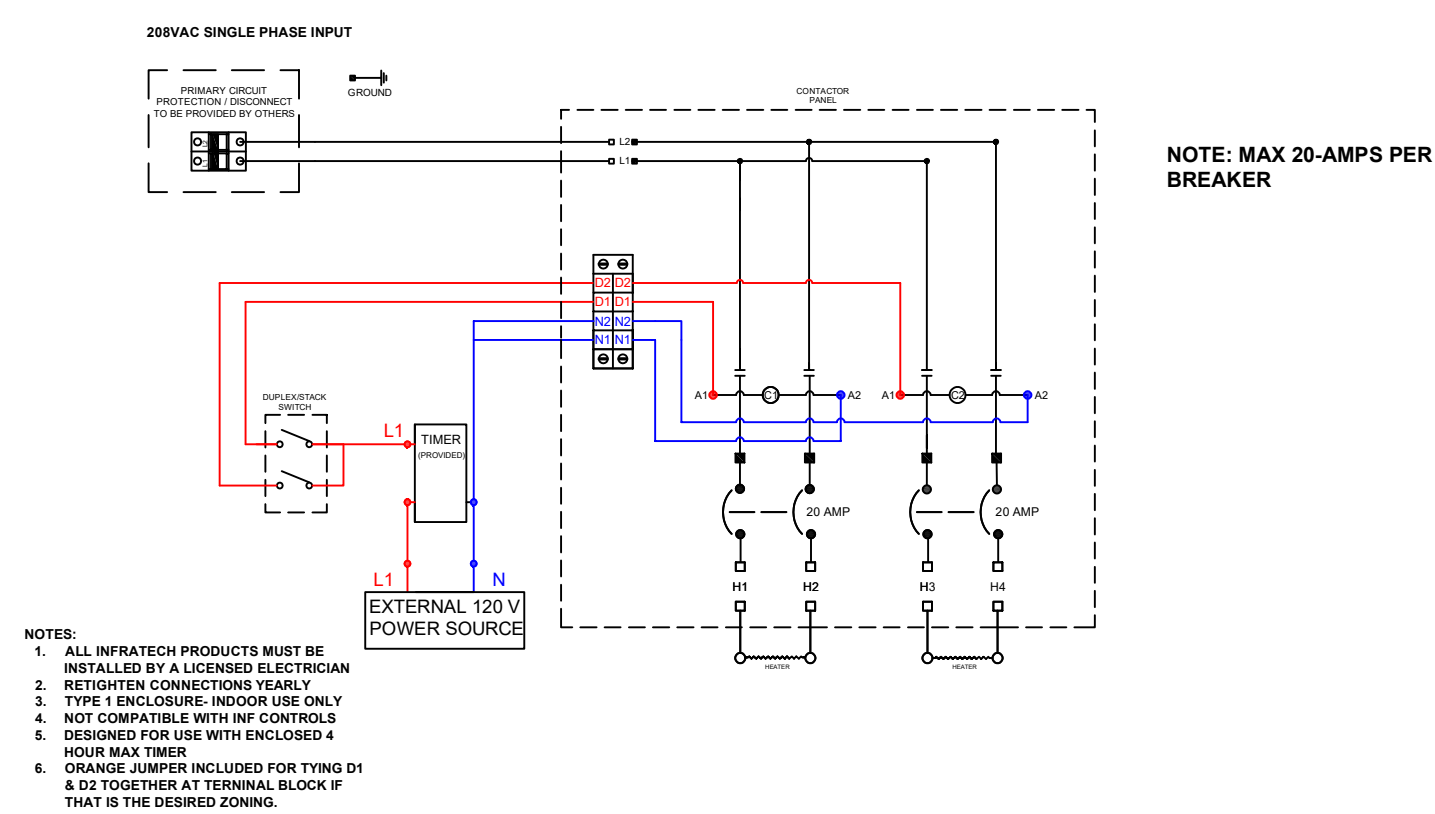

FOR USE WITH 480VAC HEATERS

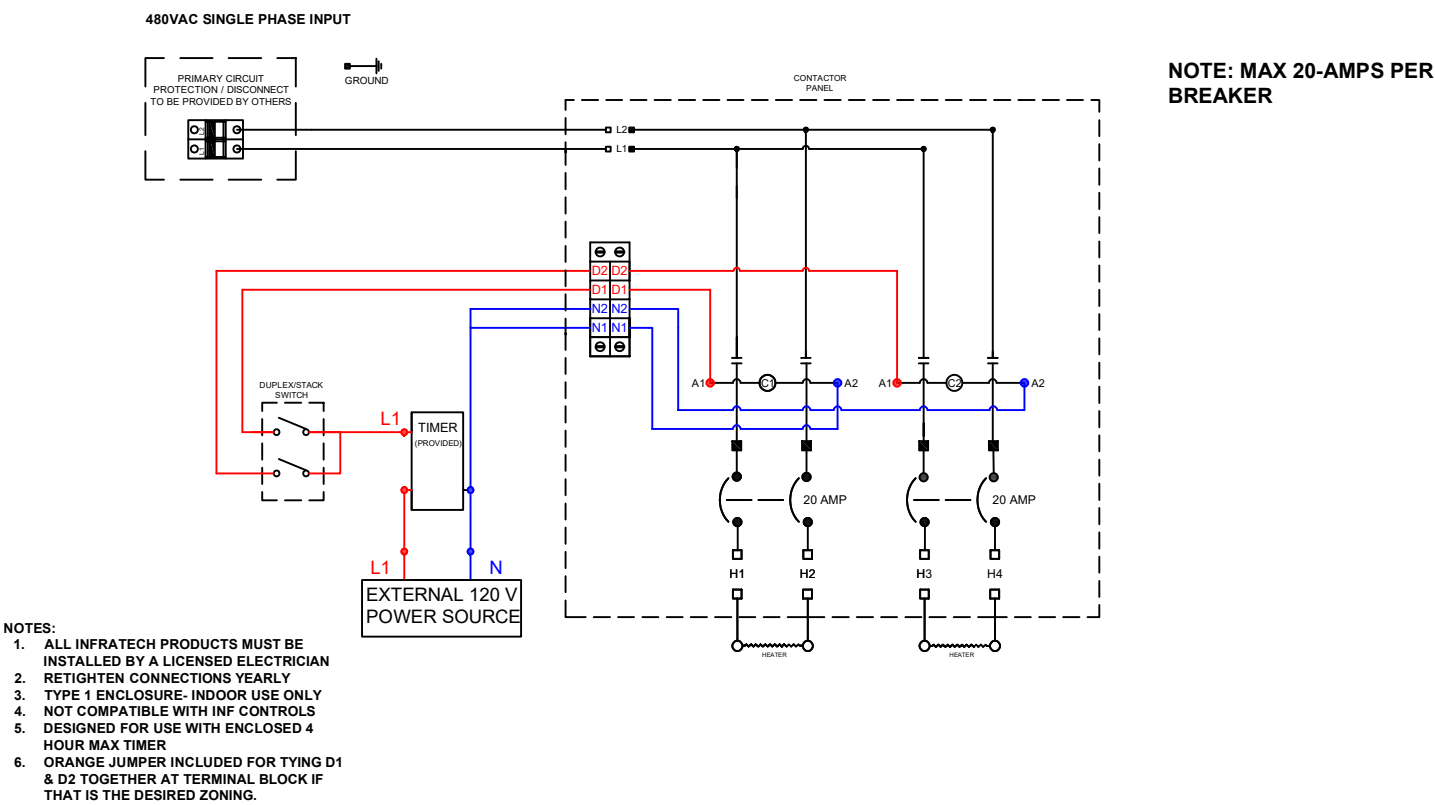


CONTACT INFRATECH FOR A CUSTOM CONTACTOR PANEL

INFRATECH www.infratech-usa.com		344 W. 157th Street Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674
DESCRIPTION		
DUAL CONTACTOR PANEL WITH BREAKERS, SINGLE PHASE INPUT, PROVIDED TIMER.		
PART# 14-4710-20B		
ITEM# CP-12000-2X-20B		
DATE May 24, 2024		
DWG# CPDIAG2-20B		

FOR USE WITH 240VAC HEATERS

240VAC SINGLE PHASE INPUT

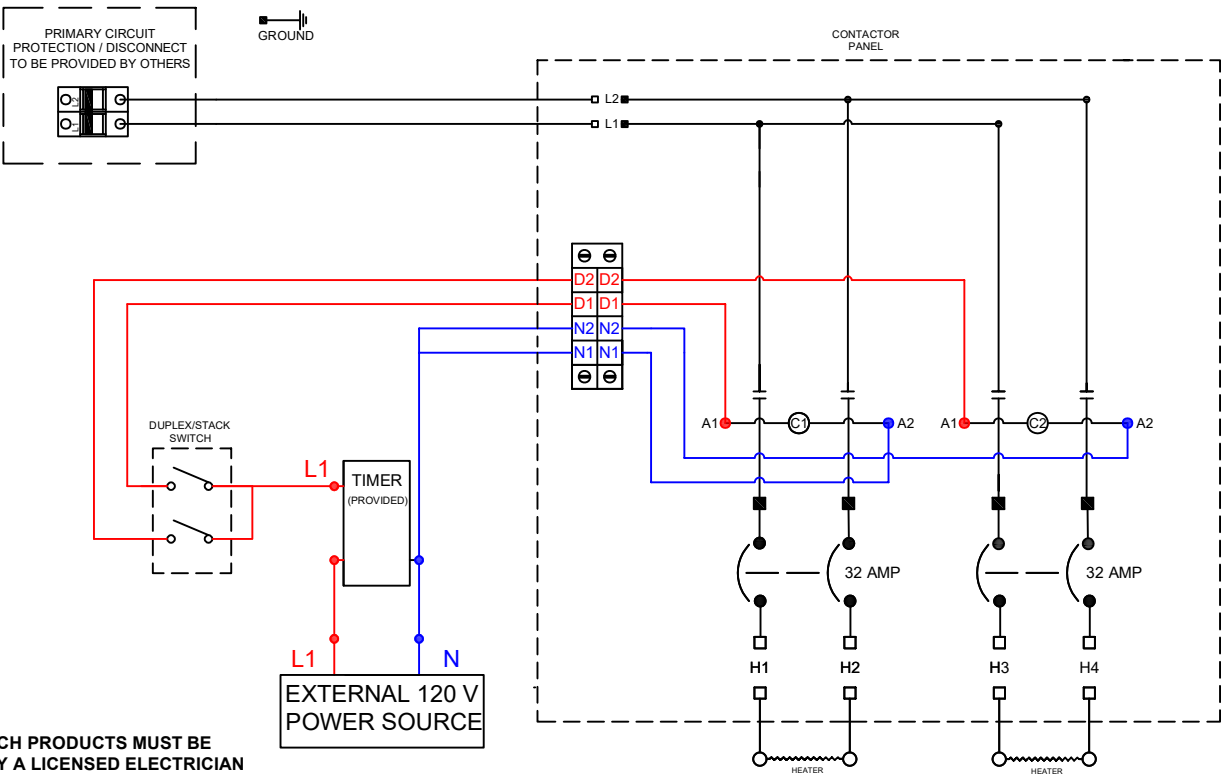


NOTE: MAX 32-AMPS PER BREAKER

- NOTES:
1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
 2. RETIGHTEN CONNECTIONS YEARLY
 3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
 4. NOT COMPATIBLE WITH INF CONTROLS
 5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER
 6. ORANGE JUMPER INCLUDED FOR TYING D1 & D2 TOGETHER AT TERMINAL BLOCK IF THAT IS THE DESIRED ZONING.

FOR USE WITH 208VAC HEATERS

208VAC SINGLE PHASE INPUT

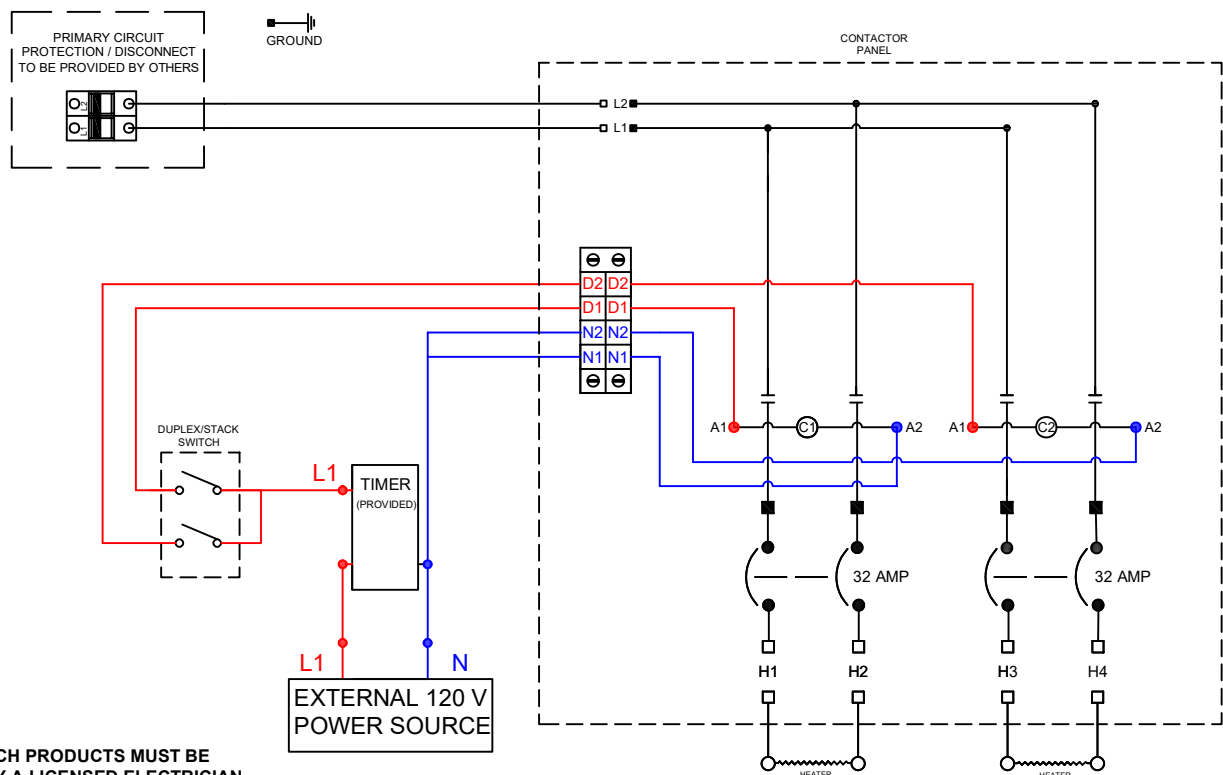

NOTE: MAX 32-AMPS PER BREAKER

- NOTES:
1. ALL INFRATECH PRODUCTS MUST BE INSTALLED BY A LICENSED ELECTRICIAN
 2. RETIGHTEN CONNECTIONS YEARLY
 3. TYPE 1 ENCLOSURE- INDOOR USE ONLY
 4. NOT COMPATIBLE WITH INF CONTROLS
 5. DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER
 6. ORANGE JUMPER INCLUDED FOR TYING D1 & D2 TOGETHER AT TERMINAL BLOCK IF THAT IS THE DESIRED ZONING.

CONTACT INFRATECH FOR A CUSTOM CONTACTOR PANEL.

INFRATECH www.infratech-usa.com		344 W. 157th Street Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674
DESCRIPTION		DUAL CONTACTOR PANEL WITH BREAKERS, SINGLE PHASE INPUT, PROVIDED TIMER.
DATE		PART# 14-4710-32B
May 24, 2024		ITEM# CP-12000-2X-32B
		DWG# CPDIAG2-32B