


FOR USE WITH 240VAC HEATERS

240VAC SINGLE PHASE INPUT

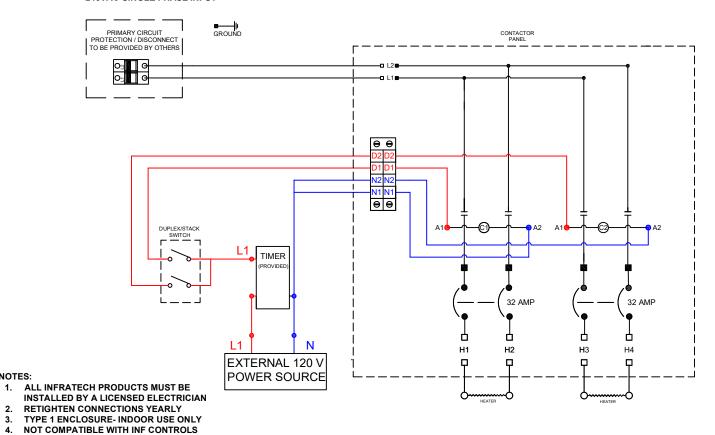

NOTE: MAX 32-AMPS PER BREAKER

FOR USE WITH 208VAC HEATERS



DESIGNED FOR USE WITH ENCLOSED 4


ORANGE JUMPER INCLUDED FOR TYING D1 & D2 TOGETHER AT TERMINAL BLOCK IF THAT IS THE DESIRED ZONING.

HOUR MAX TIMER

NOTES:

NOTES:

DESIGNED FOR USE WITH ENCLOSED 4 HOUR MAX TIMER ORANGE JUMPER INCLUDED FOR TYING D1 & D2 TOGETHER AT TERMINAL BLOCK IF THAT IS THE DESIRED ZONING.

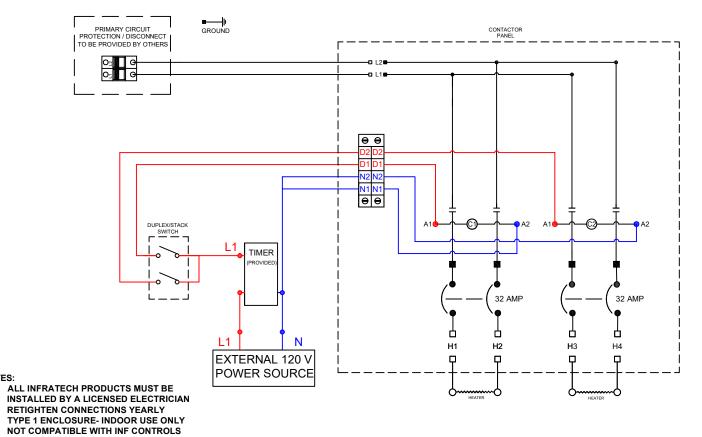

NOTE: MAX 32-AMPS PER BREAKER

CONTACT INFRATECH FOR A CUSTOM CONTACTOR PANEL.

DUAL CONTACTOR PANEL WITH BREAKERS, SINGLE PHASE INPUT, PROVIDED TIMER. 14-4710-32B CP-12000-2X-32B May 24, 2024 CPDIAG2-32B