
IMPORTANT — PLEASE READ PRIOR TO INSTALLATION

Correct Placement for the Universal Relay Panel

INFRATECH COMFORT

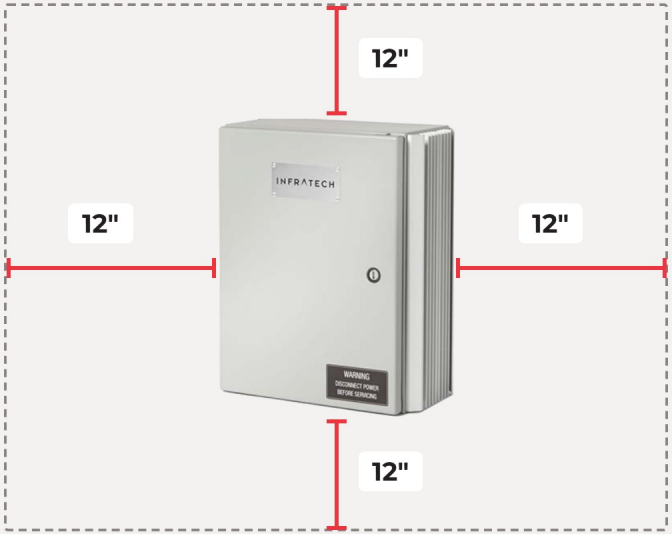

MIN. CLEARANCE · ALL FOUR SIDES

Not to scale

UNIVERSAL RELAY PANEL PLACEMENT

01 Surface mount in a well-ventilated area.

02 Heat sinks are the 1" deep aluminum extrusions on the left and right sides of the panel. It is suggested the power be brought in through the top or bottom of the panel (not from the back).

03 **Minimum clearance is 12" on all four sides.** Additional clearance will be needed if placed in a poorly ventilated area, or locations with elevated temperatures.

04 NEMA 4 enclosure.

05 Must be accessible per the National Electrical Code (NEC).



Use in conjunction with a 120V Dimmer & Timer

120V Universal Slide Dimmer and Timer provided for convenience. Customer also has the ability to source designs and colors to match their décor.

NOTE | Use of competitor heaters/accessories with Infratech controls may void the Infratech warranty.